

WEIGHT
INDICATOR

VC-80 I



CELY
VC SERIES



LED
DISPLAY



CONNECTABLE TO
PLATFORM UP TO
4 LOAD CELLS



INTERNAL
RECHARGEABLE
BATTERY



M
METROLOGICAL
VERIFICATION
OPTIONAL



Outstanding functions

- Weight-Tare-Accumulation.
- Checkweighing (minimum-maximum) with alarm.

Weighing

- Connection to weighing platform of up to 4 load cells.
- Up to 6,000 divisions. Monorange.


Construction

- Structure:
 - Stainless steel.
- Keypad and display:
 - Display with 7-keys and backlit LCD display of 3 digits (52 mm).

Power supply

- AC (12 V / 500 mA) adaptor.
- (6 V / 4 Ah) internal rechargeable battery.
 - Up to 50 hours' runtime (depending on conditions of use).

DIMENSIONS

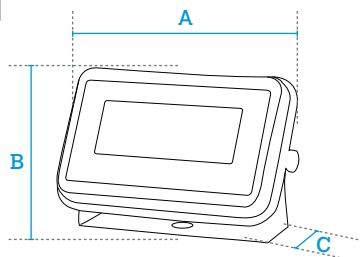

DATA IN mm

A 266,6

B 172,6

C 72

MODEL:

VC-80 I

Ref.:

71AVC80I00UE

Options

Option	Characteristics	Ref.
Metrological verification (M)	According to EU weighing directives for indicator + platform assemblies. (See section on equipment metrological verification).	Contact us

Accessories

H330 mm stainless
steel column kit



Ref: 494533B

H660 mm stainless
steel column kit



Ref: 494535B